DURAGRIP®

Heavy duty vinyl flooring with easy clean, Topguard™ PUR coated surface.

5753 Cottonseed

5758 Linen

5754 Moonlight

5710 Steelwork

5761 Burnt Almond

5733 Storm Burst

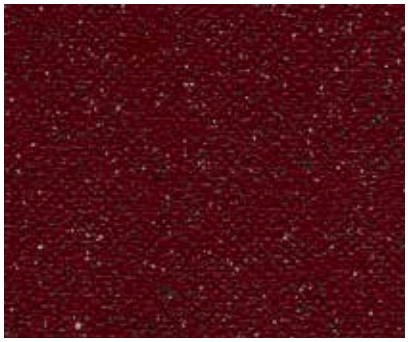

5795 Cranberry

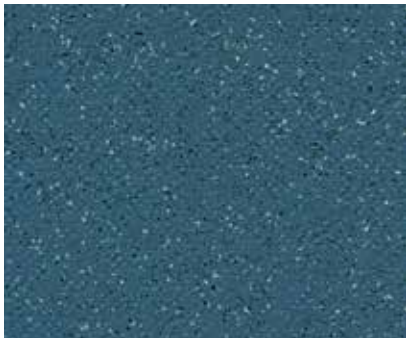

5784 Cornflower

5749 Pitch Black

5790 Juniper

5789 Dark Water

DURAFLOR

DURAGRIP®

Heavy duty vinyl flooring with easy clean, Topguard™ PUR coated surface.

Performance

- **Hygiene** – more hygienic environment due to Duragrip's antibacterial and fungistatic treatment.
- **Longer Life** – Duragrip is produced from 100% PVC (no fillers) for superior performance and durability.
- **Easy to Maintain** – due to a non-porus surface of pure vinyl to ensure easier cleaning.
- **Colours** – increased colour clarity for complementing modern interiors.

Developed to meet the most demanding hygiene requirements. Duragrip is widely used in hospitals, care homes, schools, food processing areas and other flooring applications where safety, hygiene and durability are paramount. The high vinyl content makes Duragrip flexible and easier to instal as well as being very hard wearing which ensures it will perform with heavy foot traffic in most contact locations. With its attractive colour palette, Duragrip is also very popular for social housing use. For a copy of our installation guide, please contact our sales office.

Environment

- 100% Recyclable
- Contains Recycled Content
- No waxes / polishes for life

Duragrips longevity and green credentials ensure that it will give an excellent performance as well as reducing the impact on the environment.

Maintenance

No waxes or polishes are required. For a copy of our Maintenance Guide please contact our sales office.

Guarantee

Duragrip is offered with a 12 year commercial wear guarantee - for full guarantee details please contact our sales office.

Product Specifications

Dimensions

Total Thickness
2.0mm

Total Weight
2,700gm²

Width of Roll
2m

Length of Rolls
20m

Technical Data

Wear Rating
EN 685/34/43

EN685/34 EN685/43

Fire Rating
EN 13501-1 / Bfl - s1
ASTM E 648/662 / class1 / pass

Slip Resistance
RRL Pendulum Test (wet) - > 36
DIN 51130 - R10

Light Fastness
EN ISO 105-B02 - Grade 6

Dimensional Stability
EN ISO 23999
Max - 0.2%

Residual Indentation
EN ISO 24343
0.1mm

Chemical Resistance
EN ISO 26987 / ASTM F925-02
Good Resistance

TG Topguard PUR
Antibacterial
Tough & durable
Flexible
Easy to clean
100% Recyclable

DURAFLOR

01592 630 030
uksales@duraflor.com

DURAFLOR.COM

CI/SfB (43) Tn6

0616