

DURAWOOD

Heavy duty vinyl flooring with antibacterial, easy clean, Topguard™ PUR coated surface.



9425 Original Oak



9430 English Oak



9486 Heritage Oak




9478 Aged Oak



9470 Weathered Timber



9466 Stained Walnut

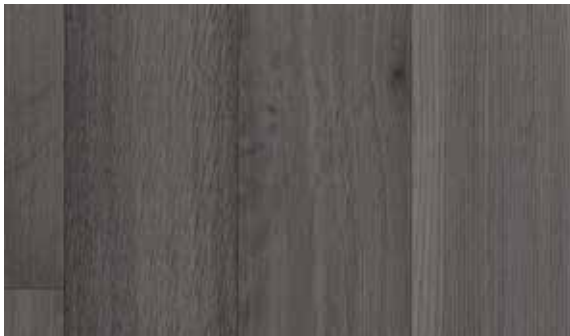

9451 Ashen Wood



9459 Smoked Chestnut

DURAFLOOR

DURAWOOD

Heavy duty vinyl flooring with antibacterial, easy clean, Topguard™ PUR coated surface.



Performance

- Hygiene - more hygienic environment due to Durawood's antibacterial Topguard™ surface.
- Longer Life - with a very heavy commercial and heavy industrial rating, Durawood will give excellent lifecycle cost and comes with an outstanding 12 year guarantee.
- Easy to Maintain - The Topguard™ PUR coated surface ensures easier cleaning.
- Superior Design - available in a popular range of wood designs, Durawood is a versatile product that has an application in many types of interiors.

Developed to meet the needs of specifiers and end users alike. Durawood is ideal for commercial buildings including offices, retail outlets, nursing homes and hospitals, as well as giving excellent durability for domestic / social housing use. Its popular colour range and Topguard™ PUR coated surface make it very suitable for modern, distinctive interiors that need a performance floorcovering. For a copy of our installation guide, please contact our sales office.

Environment

- A / A+ BRE Rating
- 100% Recyclable
- 0% Industrial Waste Water from manufacturing process
- Reduced CO² emissions and energy consumption.

Durawood's longevity and green credentials ensure that it will give an excellent performance as well as reducing the impact on the environment.

Maintenance

Designed for heavy wear areas, Durawood is easy to maintain. For a copy of our Maintenance Guide please contact our sales office.

Guarantee

Durawood is offered with a 12 year commercial wear guarantee - for full guarantee details please contact our sales office.

Product Specifications

Dimensions

 Total Thickness 2.0mm	 Total Weight 2,760gm ²
 Width of Roll 2m	 Wear Layer 0.7mm

Technical Data

 Wear Rating EN 23/34/43	 EN685/23	 EN685/34	 EN685/43
 Fire Rating EN 13501-1 / Bfl - s1			
 Slip Resistance DIN 51130 - R10	 Acoustic Insulation ISO 717-1 - ΔLw 7dB		
 Static Electrical Propensity EN 2815 - < 2k			
 Colour Fastness EN 20105 - B02 - 6	 Residual Indentation EN 433 - ≤ 0.10mm		
 Dimensional Stability EN 434 - ≤ 0.05%	 Underfloor Heating EN 12 524 - Suitable		
 Chemical Products Resistance EN 423 - Very Good			

 Topguard PUR	 Antibacterial	 Tough & durable
 Flexible	 Easy to clean	 100% Recyclable

DURAFLOOR

01592 630 030
uksales@durafloor.com

DURAFLOOR.COM

CI/SfB	(43)	Tn6
--------	------	-----